


Applications: Cooling cabinets, ice cream machines, ice machines, water coolers, condenser, evaporators, cooker hoods.

Material: Aluminium and galvanized steel, single piece.

Rotation: CW or CCW with different angles to optimise airflow.

Mounting: Unit bearing type, hubless with coupler; with shaft hubs.

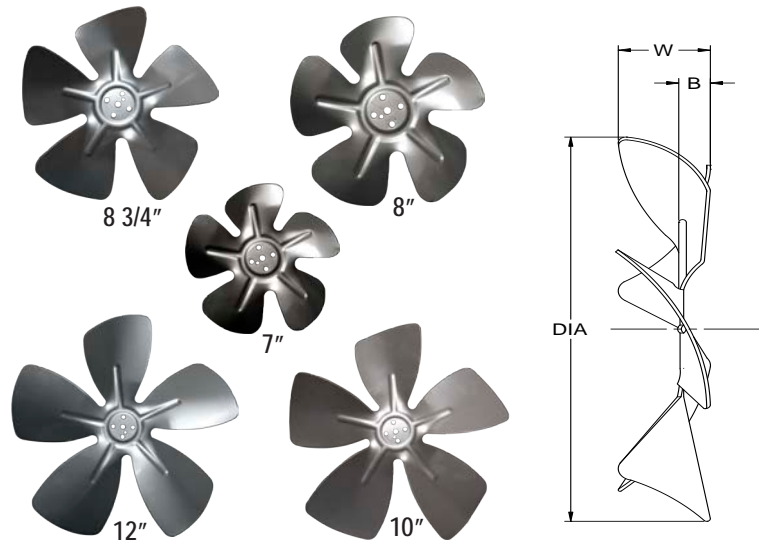

Fan Dia.	Model	Hub	Pitch	B	W	Max. RPM
7.00"	SH-700-28-5	Std. bore*	28°	.50"	1.00"	3600
	UB-700-28-5	Unit bearing				
	SH-700-30-5	Std. bore*	30°	.625"	1.50"	
	UB-700-30-5	Unit bearing				
	SH-700-31-5	Std. bore*	31°	.75"	1.75"	
	UB-700-31-5	Unit bearing				
8.00"	SH-800-28-5	Std. bore*	28°	.50"	1.00"	3600
	UB-800-28-5	Unit bearing				
	SH-800-30-5	Std. bore*	30°	.625"	1.625"	
	UB-800-30-5	Unit bearing				
	SH-800-31-5	Std. bore*	31°	.75"	1.75"	
	UB-800-31-5	Unit bearing				
8.75"	SH-875-28-5	Std. bore*	28°	.50"	1.00"	3600
	UB-875-28-5	Unit bearing				
	SH-875-30-5	Std. bore*	30°	.625"	1.25"	
	UB-875-30-5	Unit bearing				
	SH-875-31-5	Std. bore*	31°	.75"	1.625"	
	UB-875-31-5	Unit bearing				
10.00"	SH-1000-28-5	Std. bore*	28°	.50"	1.125"	2500
	UB-1000-28-5	Unit bearing				
	SH-1000-30-5	Std. bore*	30°	.625"	1.50"	
	UB-1000-30-5	Unit bearing				
	SH-1000-31-5	Std. bore*	31°	.75"	1.625"	
	UB-1000-31-5	Unit bearing				
12.00"	SH-1200-28-5	Std. bore*	28°	.50"	1.125"	2500
	UB-1200-28-5	Unit bearing				
	SH-1200-30-5	Std. bore*	30°	.625"	1.50"	
	UB-1200-30-5	Unit bearing				
	SH-1200-31-5	Std. bore*	31°	.75"	1.625"	
	UB-1200-31-5	Unit bearing				

Features:



Axial Airflow.

Stamped Steel hubs.

Designed in 3 blades, to provide maximum airflow, at low noise level and low power consumption.

Available electrostatic paint finish.

Dynamic balancing on all products.

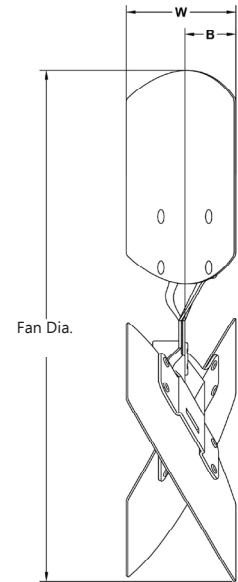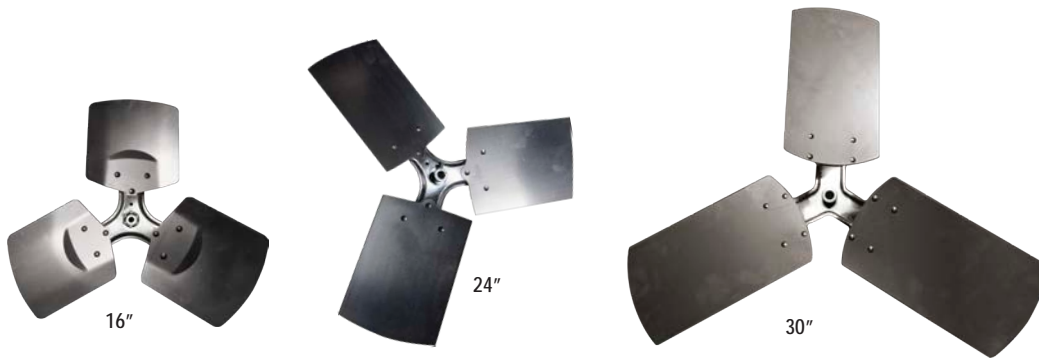


FSL= FAN STANDARD LINE

Fan Dia.	Model	Hub dia.	Max. RPM	Pitch	B	W
16"	FSL16-3-11	3/8, 1/2"	1725	11°	0.30"	1.3"
	FSL16-3-15	3/8, 1/2"		15°	0.50"	1.7"
	FSL16-3-25	3/8, 1/2"		25°	1.26"	2.8"
	FSL16-3-27	3/8, 1/2"		27°	1.40"	3.0"
22.5"	FSL22.5-3-11	1/2, 5/8, 3/4"	1140	11°	0.30"	1.3"
	FSL22.5-3-15	1/2, 5/8, 3/4"		15°	0.50"	1.7"
	FSL22.5-3-25	1/2, 5/8, 3/4"		25°	1.26"	2.8"
	FSL22.5-3-27	1/2, 5/8, 3/4"		27°	1.40"	3.0"
24"	FSL24-3-11	1/2, 5/8, 3/4"	1140	11°	0.30"	1.3"
	FSL24-3-15	1/2, 5/8, 3/4"		15°	0.50"	1.7"
	FSL24-3-25	1/2, 5/8, 3/4"		25°	1.26"	2.8"
	FSL24-3-27	1/2, 5/8, 3/4"		27°	1.40"	3.0"
28"	FSL28-3-11	1/2, 5/8, 3/4"	1140	11°	0.30"	1.3"
	FSL28-3-15	1/2, 5/8, 3/4"		15°	0.50"	1.7"
	FSL28-3-25	1/2, 5/8, 3/4"		25°	1.26"	2.8"
	FSL28-3-27	1/2, 5/8, 3/4"		27°	1.40"	3.0"
30"	FSL30-3-11	1/2, 5/8, 3/4"	1140	11°	0.30"	1.3"
	FSL30-3-15	1/2, 5/8, 3/4"		15°	0.50"	1.7"
	FSL30-3-25	1/2, 5/8, 3/4"		25°	1.26"	2.8"
	FSL30-3-27	1/2, 5/8, 3/4"		27°	1.40"	3.0"

Applications: Evaporators, condenser, commercial chillers in domestic refrigeration. Desk fans and general ventilation.

Rotation: Viewing flow air discharge side

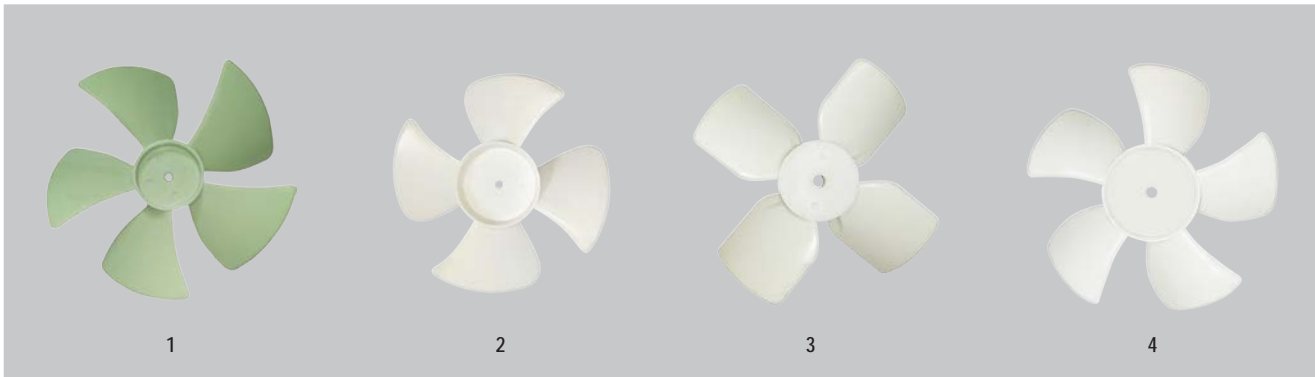

No.	Part Number	ROT	Dia.	Direction	Material	Blades	Color
1	200050510	CW	6.5"	AA	Polyethylene	5	Green
2	200607962	CCW	5.5"	AA	Valox	4	White
3	200070100	CW / CCW	4.00"	AO	Nylon F.V. Nat.	4	Natural
4	200607972	CW	4.00"	AO	Valoy	5	White
5	200050366	CW	6.0"	AO	Polyethylene	4	Gray
6	200050506	CW	4.0"	AA-AO	Polyethylene	4	Gray
7	010002498	CCW	4.0"	AA-AO	Zytel	4	Black
8	106218466	CW	4.0"	AA-AO	Lexan 500	5	Black

AA: Air flow away from motor

AO: Air flow towards motor

